



IN-LINE Foam Inductors

For portable and fixed Foam Systems



Application

The MX Series In-line foam inductors for fixed-flow systems.


Operation

The MX Series is designed for installation within pipework, the MX-40 is available with either a threaded or flanged connection, with the MX-50, MX-80 and MX-100 being available only with flanged connections - either ANSI # 150 or DIN PN-16.

MX series inductors work on the Venturi principle, i.e. foam concentrate is sucked into the inductor without needing to use any pressurised sources such as a bladder tank or foam pump. Inductors are equipped with an exact orifice plate at the foam entry port in order to provide the required accurate foam supply. Each inductor is factory calibrated for the required flow, pressure and foam concentrate type

Requirement

MX Series inductors are delivered with factory calibration as per project specific requirements. To ensure the inductor functions properly as required, all of the following information is essential:

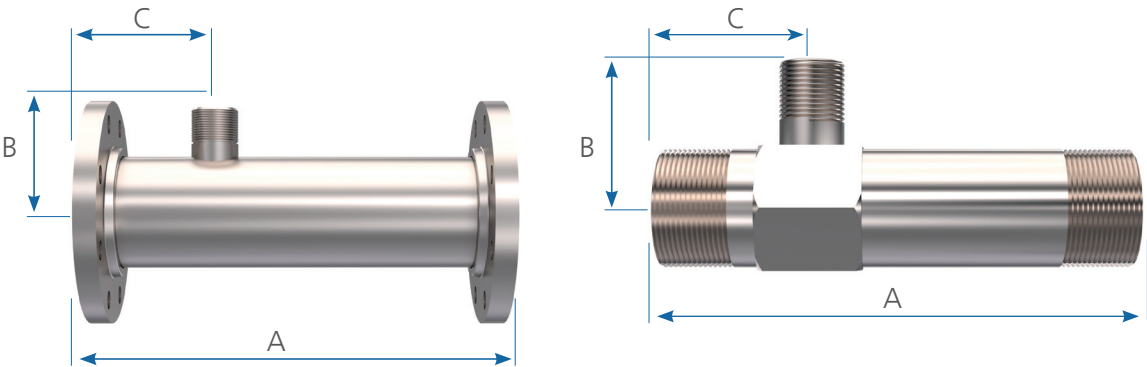


Technical Specifications

Model	MX-40	MX-50	MX-80	MX-100
A (mm)	194±2	230±2	316±2	425±2
B (mm)	60±2	75±2	89±2	107±2
C (mm)	62.50±2	72±2	96±2	127±2
Connection	Threaded BSP or NPT	Flange ANSI 2" SORF #150	Flange ANSI 3" SORF #150	Flange ANSI 4" SORF #150
Foam Inlet	3/4" NPT (M)	1" NPT (M)	1" NPT (M)	1.5" NPT (M)
Material	SS-316L/ Super Duplex	SS-316L/ Super Duplex	SS-316L/ Super Duplex	SS-316L/ Super Duplex
Internal Fittings	POM	POM	POM	POM
Finish	Natural / Painted	Natural / Painted	Natural / Painted	Natural / Painted
Approx. Weight	1.2 kg / 2.65 lb	5.7 kg / 12.5 lb	11.6 kg / 25.6 lb	18.2 kg / 40.1 lb
Foam Type	AFFF-1% and 3%*	AFFF-1% and 3%	AFFF-1% and 3%*	AFFF-1% and 3%*
Flow Rate - Min	265 lpm (70 gpm)	505 lpm (133 gpm)	1080 lpm (285 gpm)	2040 lpm (539 gpm)
Flow Rate - Max.	525 lpm (139 gpm)	1060 lpm (280 gpm)	2250 lpm (594 gpm)	4300 lpm (1136 gpm)
Working Pressure - Min.	4 bar (58psi)	4 bar (58psi)	4 bar (58 psi)	4 bar (58psi)
Working Pressure - Max.	16 bar (232psi)	16 bar (232psi)	16 bar (232 psi)	16 bar (232psi)

Listing and Certification

-  American Bureau of Shipping (ABS)
-  Lloyd's Register of Shipping (LRS)
-  Underwriters Laboratory (UL)



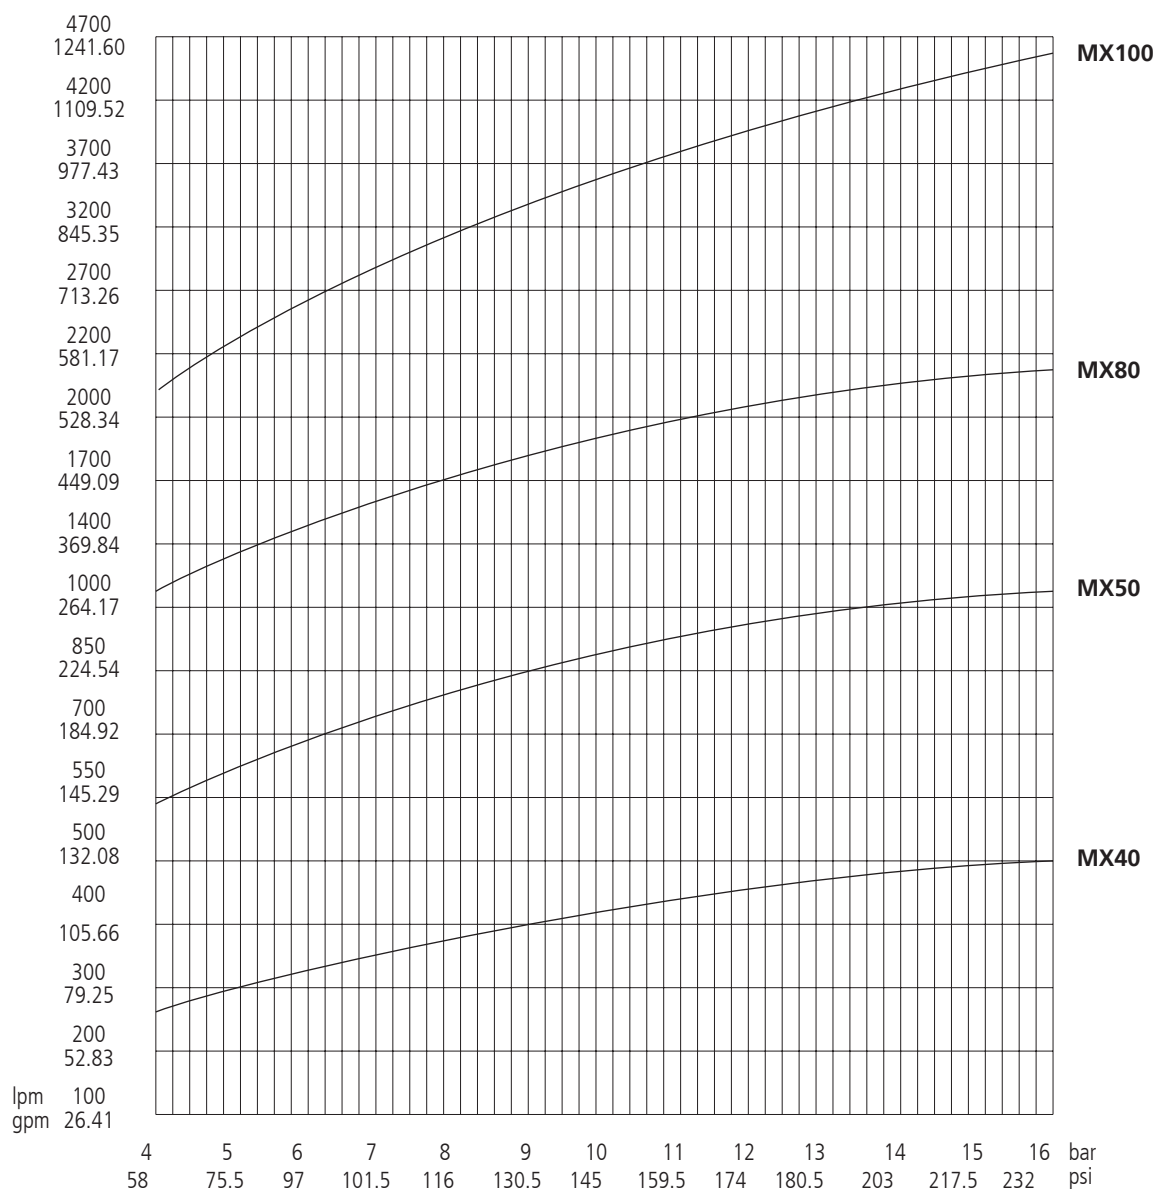

Part Number

Stainless Steel 316L – AFFF-3%		
MX-40	1.5"	118050106
MX-50	2"	118060106
MX-80	3"	118080106
MX-100	4"	118090106

Super Duplex – AFFF-3%		
MX-40	1.5"	118050107
MX-50	2"	118060107
MX-80	3"	118080107
MX-100	4"	118090107





Marsol Technologies Inc.

14331, Spencer Rd. (FM-529), Houston,
Texas, 77095, USA

Tel: +1 346 701 8268 | Fax : +1 346 701 8261
info@marsoltech.com | www.marsoltech.com

Marsol Technologies FZE.

Hamriyah Free Zone, P1
P.O. Box 50481 Sharjah, UAE

Tel: +971 06 52 69 230